
# Soligor Universal Automatic 74 Lens System



#### SOLIGOR T4 UNIVERSAL AUTOMATIC LENSES

The Soligor T4 Universal Automatic Lenses represent the ultimate in interchangeable precision optics. The Soligor lenses are manufactured in accordance with the strictest and most rigid optical engineering standards, and the outstanding quality of Soligor optics has been endorsed by their worldwide acceptance and popularity.

This latest Soligor development, the T4 Universal Automatic lenses, feature high quality optics with a range of interchangeable T-4 mounts, coupling to the automatic diaphragm mechanism of practically all 35 mm SLR cameras. Where exposure systems are incorporated, they couple also to the metering system, making them the most versatile in the world. Yet, the Soligor lenses are modestly priced to fit any budget.

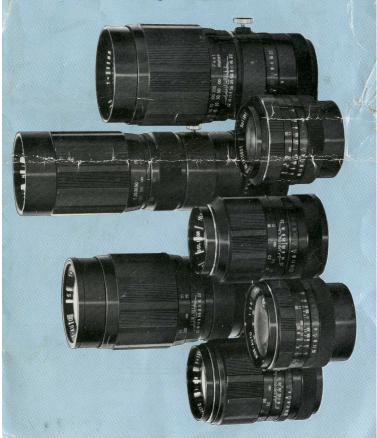

INTERCHANGEABLE LENSES FOR 35 mm S.L.R. CAMERAS

#### HOW TO USE THE SOLIGOR T4 UNIVERSAL **AUTOMATIC SYSTEM**

Operation of these lenses is extremely easy, simple and fast. To assure proper operation, follow these step by step instructions:

1) Open the mount retainingbayonet, by turning the outerring (1) in in anti-clockwise direction as indicated by the 7 arrow "O" (2)

Set the diaphragm control (3) 21 opposite the reference mark (4) on the lens barrel.

Note: Lenses for Miranda. Nikon, Pentax, and Canon (yellow and red engraved mounts), operate over the range of black engraved diaphragm openings.

Lenses for Minolta (green engraved) operate over the green engraved diaphragm openings.

31 For lenses, coupling the exposure system, note the mark on the T-4 lensmount "set pin here".

Aligment pin (5), indicated by 4) an arrow on the T-4 mount. fits into the alignment slot (6) indicated by a arrow on the lens base. To permit the T-4 mount to seat properly into

the lensbase, turn the diaphragm control ring slightly to the left or right, holding the mount pressed down.

5) When the mount is in place, close the mount retaining ring by turning the ring (1) in clockwise direction, as indicated by arrow "L" (7).

61 To remove the T-4 lensmount from the lens, push the lever (8) and turn the mount retaining ring (1) in anti-clockwise direction (2) and lift the mount from the lensbase.



5

## SPECIFICATIONS OF THE SOLIGOR T4 UNIVERSAL AUTOMATIC LENSES

28mm f 2.8 Angle of view: 74° Apertures: 2.8-16 Composition: 7 el/6 gr. Filtersize: 58 mm

35mm f 2.8Angle of view:  $64^{\circ}$ Apertures: 2.8-16Composition: 6 el/5 gr. Filtersize: 49 mm

105mm f 2.8 Angle of view: 24° Apertures: 2.8—16 Composition: 4 el/4 gr. Filtersize: 49 mm

135mm f 2.8 Angle of view: 18° Apertures: 2.8—22 Composition: 4 el/4 gr. Filtersize: 55 mm


135mm f 3.5 Angle of view: 18° Apertures: 3.5–22 Composition: 4 el/4 gr. Filtersize: 49 mm

200mm f 3.5 Angle of view: 12° Apertures: 3.5—22 Composition: 4 el/4 gr. Filtersize: 67 mm


250mm f 4.5 Angle of view: 10° Apertures: 4.5—22 Composition: 4 el/4 gr. Filtersize: 62 mm

300mm f 5.5 Angle of view: 8° Apertures: 5.5—22 Composition: 5 el/5 gr. Filtersize: 62 mm

90-230mm f 4.5 Angle of view: 27°—12° Apertures: 4.5—22 Composition: 11 el/7 gr. Filtersize: 58 mm

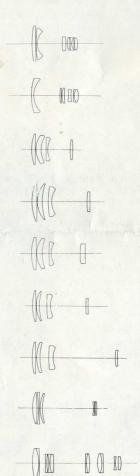

UNIVERSAL INTERCHANGEABLE T-4 REAR MOUNT SYSTEM, PERMITTING THE SAME LENS TO BE FREELY INTERCHANGED BETWEEN PRACTICALLY ALL 35 MM SLR CAMERAS.

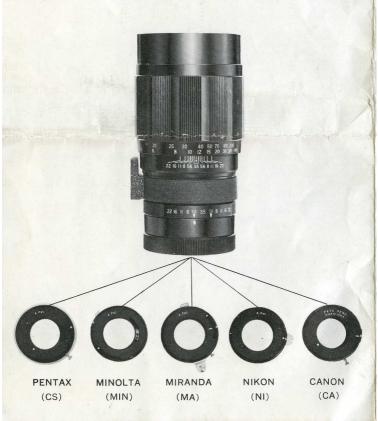

### OTHER WORLD FAMOUS SOLIGOR INTER-CHANGEABLE OPTICS

AUTOMATIC LENSES with fixed mounts, available in a range of focal lengths from 25 mm to 400 mm. These lenses couple to the following camera systems: Pentax (Praktica), Nikon, Canon, Minolta, Miranda and Exakta.

PRESET LENSES with interchangeable T-2 mount system in a range of focal lengths from 25 mm—800 mm are available. These lenses can be operated on all 35 mm SLR cameras.

Furthermore Enlarging lenses, ITV and 16 mm Cine lenses, Teleconverters and Fisheye converters are available in the Soligor optical system.









ANOTHER QUALITY PRODUCT OF ALLIMATSU CORP.

TOKYO-JAPAN